



# SENSE A – 1000 Barrier




Functions



Options



Features

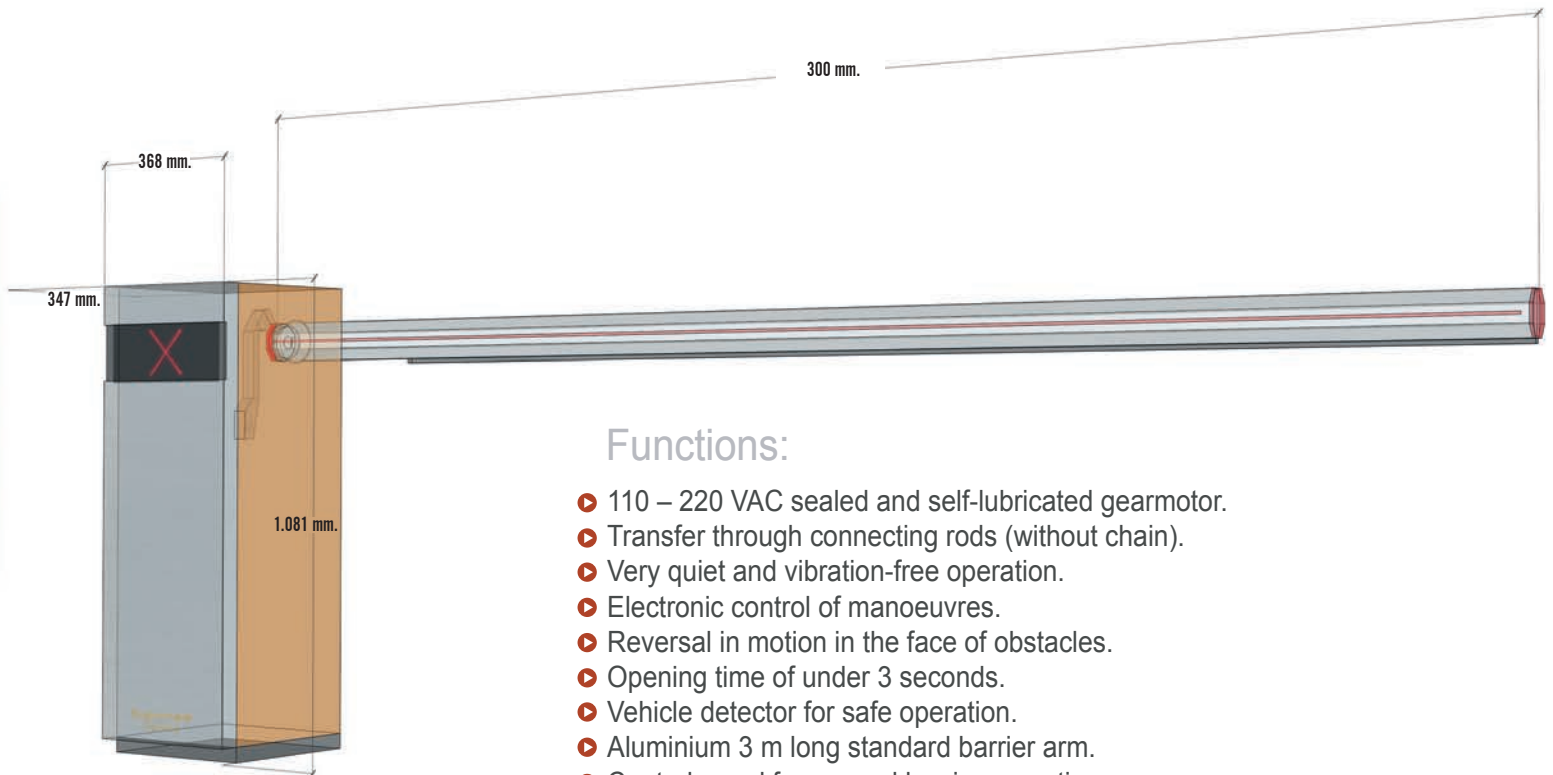

## Functions:

- ▶ 110 – 220 VAC sealed and self-lubricated gearmotor.
- ▶ Transfer through connecting rods (without chain).
- ▶ Very quiet and vibration-free operation.
- ▶ Electronic control of manoeuvres.
- ▶ Reversal in motion in the face of obstacles.
- ▶ Opening time of under 3 seconds.
- ▶ Vehicle detector for safe operation.
- ▶ Aluminium 3 m long standard barrier arm.
- ▶ Control panel for manual barrier operation.
- ▶ Interface for traffic light control.
- ▶ High operating speed.
- ▶ Manual opening possible in case of power failure.
- ▶ Unit made from aluminium with double primer and stainless steel, weatherproof.

The images that are attached in this offer are representative of the products.



It may vary depending on the configuration required by the client.

## Options (not included):



- Red LED light strip on straight barrier arm.
- Articulated arm with red LED light.
- Remote opening and closing control.
- Straight arm up to 3 m long.



## Physical features:

- Width: 368 mm.
- Depth: 347 mm.
- Height: 1.081 mm.
- Weight: 60 Kg.
- Power supply 110 - 220 VAC., 50/60 Hz.
- 2 A consumption.
- Complies with IP-44 standards.



Working temperature: from -10° to + 75°C

Ambient Humidity:

- Minimum-. 10% (without condensation).
- Maximum-. 90% (without condensation).

